





MODEL			LSY22S
Power Pf.1.0	Standby	kVA	22
		kW	22
	Prime	kVA	20
		kW	20
	Frequency	Hz	50
	Voltage	V	230
	Rated speed	rpm	1500

Temperature (Celsius) Derate Curves
Unit: kVA

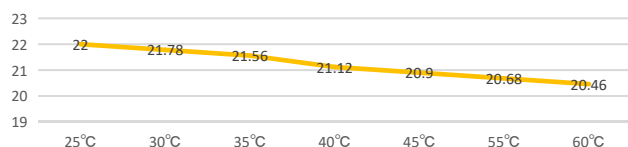

Altitude (meters) Derate Curves
Unit: kVA

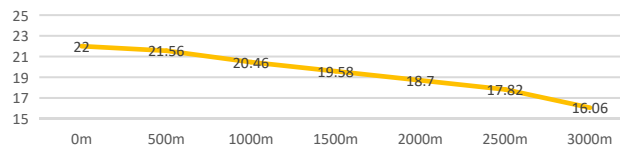

Standard reference Conditions:

Standard reference condition 25°C (77°F) air inlet temp, 100m (328ft) A.S.L 30% relative humidity. Fuel consumption data with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998, Class A2.

LEES generator sets meet the standards of

ISO9001, CE, BS5000, ISO 8528, ISO 3046, IEC 60034, NEMA MG-1.22.



Standard Features

- LEES Power provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The generator set complies with ISO 8528-5, Class G3 requirements for transient performance.
- The generator set accepts rated load in one step.
- The 50Hz generator set engine is certified by the Environmental Protection Agency (EU or MEP) to conform to EU2、EU3 nonroad emissions regulations.(≤560KW)
- A one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are also available.

Generator Features

- The brushless, rotating-field generator has broadrange reconnectability.
- The pilot-excited, permanent-magnet generator (PMG) provides superior short-circuit capability
- Controllers are available for all applications. See controller features inside.
- The low coolant level shutdown prevents overheating (standard on radiator models only)
- Integral vibration isolation eliminates the need for under-unit vibration spring isolators
- An electronic, isochronous governor delivers precise frequency regulation.
- Electronic engine controls and a generator microprocessor controller combine to deliver one of the most advanced control systems in today's generator market.

Engine Specifications

Engine Brand	LEES
Engine Model	Y495D
Cylinder No.& Configuration	4 cylinder Diesel L type
Working Mode	Naturally Aspirated
Bore x Stroke	95x105mm
Displacement	2.977L
Compression Ratio	18
Rated Power	26kW
Rated Speed	1500
Lubrication System	Splash Lubrication
Lube Oil	Conforms above CD class or SAE10W-30,15W-40
Lube Oil Capacity	8L
Battery Capacity	6-QW-45(380)*1
Fuel Type	Diesel:0#(Summer),-10#(Winter),-35#(Cold)
Fuel Consumption 25% load	3.69L/H
Fuel Consumption 50% load	5.27L/H
Fuel Consumption 75% load	6.15L/H
Fuel Consumption 100% load	6.87L/H

ALTERNATOR

Type	3-Pole, Rotating-Field
Exciter type	Brushless, Permanent-Magnet, Pilot Exciter
Voltage regulator	Solid-State, Volts/Hz
Insulation	NEMA MG1, Class H
Material	Synthetic, Nonhygroscopic
Temperature rise	Prime 130°C, 150°C Standby
Bearing: quantity, type	1, Sealed
Coupling	Flexible Disc
Amortisseur windings	Full
Rotor balancing	125% 60 Hz, 150% 50 Hz
Voltage regulation, no-load to full-load(with < 0.5% drift due to temp. variation	Single-Phase Sensing, $\pm 1\%$
One-step load acceptance	100% of Rating(ALTERNATOR)
Unbalanced load capability	100% of Rated Standby

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the generator field.
- Self-ventilated and drip-proof construction.
- Superior voltage waveform from two-thirds pitch windings and skewed stator.
- Digital solid-state.volts-per-hertz voltage regulator with $\pm 1\%$ no-load to full-load regulation.
- Brushless alternator with brushless pilot exciter for excellent load response.

Controller

Key Features

- Using microprocessor as a core, graphics LCD with big screen and backlight, key touch for operation
- Have a RS485 port, can be used for communicate to PC
- All parameters can be set from the front panel, or be set by PC used SG72
- Security password-protected programming levels
- All parameters use digital modulation, with higher reliability and stability
- Built-in speed/frequency detecting units can accurately judge the states such as crank success and over speed
- Power supply range is wide, accommodating to different starting battery voltage environment
- Built-in watch dog can never be dead halt, ensuring smooth program execution
- Modular configuration design, inserted type connection terminals, flush type installation, compact structure, easy installation



Protection

- High engine temperature
- Low oil pressure
- Over speed
- Under speed
- Loss of speed signal
- Generator over frequency
- Generator under frequency
- Generator over voltage
- Generator under voltage
- Generator over current
- Fail to start
- Auxiliary inputs

Precision measure and display of

- Mains voltage
- Mains frequency
- Mains current
- Generator voltage
- Generator current
- Generator frequency
- Generator active power (kW)
- Generator inactive power (kW)
- Generator apparent power (kVA)
- Generator power factor
- Generator starts count
- Generator hour count
- Cumulate electric energy (kWh)
- Generator temperature
- Generator pressure
- Generator fuel level
- Start battery voltage

Generating Sets Standard and Optional Features

- Engine**
- 4-stroke, water-cooled diesel engine
 - Standard air filter
 - Standard fuel filter
 - Standard oil filter
 - Oil temperature sensor
 - Low coolant level sensor
 - Radiator with blowing fan
 - Industrial silence
 - Fuel water separator
 - Water jacket heater (optional)

- Alternator**
- Class H insulation
 - IP23 Protection
 - Automatic Voltage Regulator (AVR)
 - Optional for small gensets
 - Single bearing alternator
 - Class F or class B temperature rise (optional)
 - Digital Voltage Regulator (optional)
 - Double bearing (optional)
 - Anti-Condensation Heater (optional)
 - IP41 Protection (optional)


- Electrical system**
- Maintenance-free and anti-explosion battery
 - Standard breaker
 - ABB breaker (optional)
 - ATS (optional)
 - Battery charger (optional)
 - GMS monitoring (optional)

- Packing**
- Engine manual
 - Alternator manual
 - Gensets operation and maintenance manual
 - Tool kit

- Baseframe**
- Forklift pockets
 - Pulling slots
 - Earth wire protection
 - Built-in anti vibration mountings
 - Fuel outlet value
 - Standard fuel tank
 - Enlarged fuel tank (optional)
 - Separated fuel tank (optional)

- Canopy**
- Weatherproof & sound-attenuated canopy
 - Sound-absorbing material
 - Lifting lug
 - Emergency stop button
 - Inside silencer

Overview Dimension & Weight

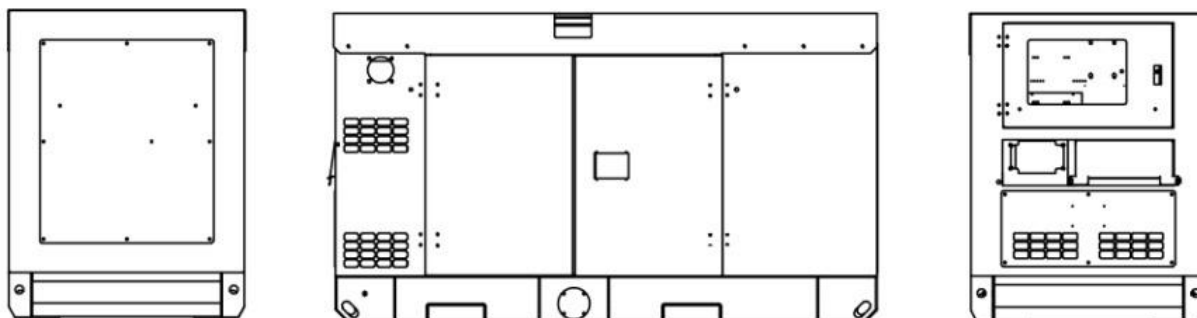

LSY22S (Silent type)					
Configuration	L= Length (mm)	W= Width (mm)	H= Height (mm)	Weight (kg)	Fuel Tank Capacity(L)
Silent Type	1955	805	1050	730	80.0



WUXI LEES POWER COMPANY LIMITED

NO.312 Highway, Luoshe Town, Wuxi, China, 214000

Tel: 86-510-85166446

Web: www.leespower.com

Email: lees@leespower.com

2024 by Wuxi Lees Power Co., Ltd. All right reserved

Follow us



<https://www.facebook.com/leesgenerator>



<https://www.linkedin.com/company/wuxi-lees-power-company-limited/>



<https://twitter.com/leesgenerator>



<https://www.youtube.com/@leespower38>