


MODEL: LSSC52NGE3

Powered by SDEC

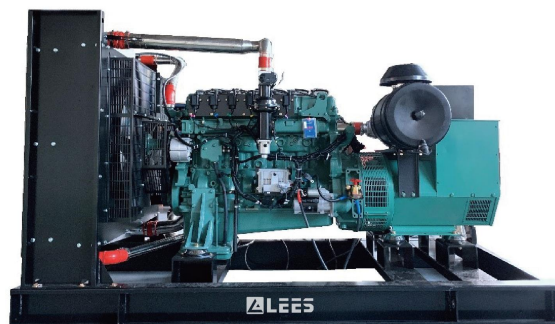

Model	LSSC52NGE3
Electrical Power	50KW
Frequency	50Hz
Voltage	380-415V
Engine	SC4HT90D2
Alternator	UCI224F-41
Fuel System	Electronic Fuel Control Valve
Governor Type	ECU

Standard Features

Engine

- Robust high speed block design provides prolonged life and lower purchasing and operating costs
- High power density and efficiency generator

Set Package

- Top tier electrical efficiency
- Low maintenance and overhaul costs driven by low oil consumption, extended service intervals, and reduced downtime
- Genset reliability verified through torsional vibration, fuel consumption, oil consumption, transient performance, and endurance testing

Alternator

- High-efficiency design
- Designed to match performance and output characteristics of SDEC engines

Applications

- LEES generator sets are capable of maximizing power production opportunities in an extensive range of industries

Control Panels

- User-friendly interface and navigation
- Scalable system to meet a wide range of installation requirements
- Expansion modules and site specific programming for specific customer requirements

Warranty

- 2 years upon arrival to the user or 3000 operation hours, whichever comes first

50Hz Humidity/Fuel Tolerant Package Performance – AC and JW Pumps

Performance	Continuous	
Frequency	50 Hz	
Genset power rating @ 0.8 power factor – kW (kVA)	50	(62.5)
Engine speed – rpm	1500	
Displacement(L)	4.3	
Compression ratio	12	
NOx emission level – mg/Nm ³ (g/bhp-hr) NOx	500	(0.99)
Fuel Consumption		
100% load with fan – MJ/kW-hr (Btu/kW-hr)	11.8	(11281)
75% load with fan – MJ/kW-hr (Btu/kW-hr)	12.5	(11950)
50% load with fan – MJ/kW-hr (Btu/kW-hr)	13.4	(12810)
Cooling System		
Auxiliary circuit temperature (maximum inlet) – °C (°F)	55	(133)
Jacket water temperature (maximum outlet) – °C (°F)	95	(173)
Inlet Air		
Combustion air inlet flow rate (0 °C, 101.3 kPa)/L/s(CFM)	85	(182)
Altitude Capability		
At 25 °C (77 °F) ambient, above sea level – m (ft)	200	(3201)
Exhaust System		
Exhaust temperature – engine outlet – °C (°F)	550	(1022)
Exhaust gas flow (0 °C, 101.3 kPa)/L/s(CFM)	145	(297)

Optional Equipment

Engine

Air Cleaner

- ☐ Standard filter
- ☐ Heavy duty filter

General

- ☐ Barring group

Lubrication

- ☐ Lubricating oil(NGEO)
- ☐ Oil level regulator
- ☐ Extended Life Oil Tank

Mufflers

- ☐ Industrial Grade(12-18 dB)
- ☐ Residential Grade(18-25 dB)
- ☐ Hospital Grade(40 dB)

Protection System

- ☐ Explosion Relief Valves

Starting/Charging

- ☐ Battery charger
- ☐ Oversized batteries

Alternator

Output voltage

- ☐ 380V ☐ 400V
- ☐ 415V

Temperature Rise

(over 40 °C ambient)

- ☐ 105°C

- ☐ 80°C

Attachments

- ☐ Anti-condensation heater
- ☐ Generator RTD module
- ☐ Neutral Ground - LV
- ☐ Differential CTs - HV

Control System

Controller

- ☐ ComAp
- ☐ DSE
- ☐ SmartGen
- ☐ DEIF

Attachments

- ☐ Discrete I/O module
- ☐ Load share module
- ☐ Local annunciator module
- ☐ Remote annunciator module
- ☐ Remote monitoring software

Enclosure

- ☐ Weather protective
- ☐ Sound attenuated

Attachments

- ☐ Cold weather bundle
- ☐ DC lighting package
- ☐ AC lighting package
- ☐ Motorized louvers

Ancillary Equipment

- ☐ Automatic transfer switch(ATS)
- ☐ Uninterruptible power supply(UPS)
- ☐ Synchronization switchgear
- ☐ Synchronization controls

Power Terminals

Circuit Breaker Options

- ☐ UL ☐ IEC
- ☐ 3-pole ☐ 4-pole
- ☐ Manually operated
- ☐ Electrically operated




Connect

Connectivity




- ☐ Ethernet
- ☐ Satellite
- ☐ Cell

Note: Some options may not be available on all models. Certifications may not be available with all model configurations. Consult factory for availability. * Configured Hydrogen Capable Units may experience rating differences on both Natural Gas and H₂ blends based on site conditions - (Fuel blending Source Provided by Customer)

Weights and Dimensions

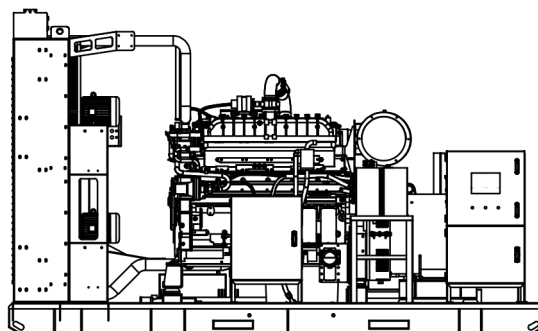

LSSC52NGE3 (Open type)				
Configuration	L = Length (mm)	W = Width (mm)	H = Height (mm)	Weight (kg)
Open Type	2100	950	1310	1080

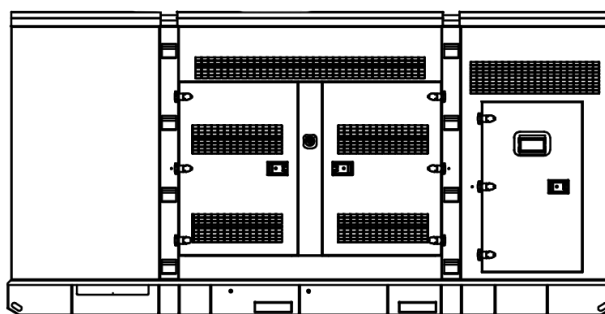

LSSC52NGE3 (Silent type)				
Configuration	L = Length (mm)	W = Width (mm)	H = Height (mm)	Weight (kg)
Silent type	2960	1100	1650	1845

Note: For reference only. Do not use for installation design. Contact your local LEES dealer for precise weights and dimensions.



WUXI LEES POWER COMPANY LIMITED
 NO.312 Highway, Luoshe Town, Wuxi, China, 214000
 Tel: 86-510-85166446
 Web: www.leespower.com
 Email: lees@leespower.com

Follow us



<https://www.facebook.com/leesgenerator>



https://www.instagram.com/lees_power/



<https://twitter.com/leesgenerator>



LEES POWER (UK) LTD

23A Buckingham Avenue, Slough Trading Estate, Slough, Berkshire, SL1 4QA, UK
 Tel: +447429488138
 Web: www.leespower.uk
 Email: lees@leespower.com



<https://www.linkedin.com/company/wuxi-lees-power-company-limited/>



<https://www.tiktok.com/@generatorsets>



<https://www.youtube.com/@leespower38>